



Feature特征


- Universal AC input/Full range
国际通用全范围交流输入
- Protections: Short circuit/Over load
短路保护, 过载保护
- Cooling by free air convection自然风冷
- High efficiency, long life and high reliability
高效率, 长寿命和高可靠性
- Using 105°C long life electrolytic capacitors
使用105度长寿命电容器
- 100% full load burn-in test 100%满载老化
- Installed with EMI filter, minimum wave
内装EMI滤波器, 极小纹波

CE RoHS


Model型号	S-200-5	S-200-12	S-200-15	S-200-24	S-200-36	S-200-48
Specification性能						
Dc voltage 直流电压	5V	12V	15V	24V	36V	48V
Rated current 额定电流	35A	16.5A	13.3A	8.5A	5.5A	4.2A
Current range 电流范围	0-35A	0-16.5A	0-13.3A	0-8.5A	0-5.5A	0-4.2A
Rated power 额定功率	175W	198W	199.5W	204W	198W	201.6W
Ripple & noise 纹波和噪音	Note:1 100mVp-p	100mVp-p	100mVp-p	100mVp-p	100mVp-p	100mVp-p
Voltage ADJ. range 电压调整范围	+10%-5%	10%	10%	10%	10%	10%
Voltage tolerance 电压精度	Note:2 ±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
Line regulation 线性调整率	Note:3 ±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
Load regulation 负载调整率	Note:4 ±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
Setup, rise, hold up time 启动, 上升, 保持时间	500ms, 50ms, 60ms/230VAC					
Input voltage range 输入电压范围	85-132VAC/170-264VAC, 47-63HZ, Selected by switch由开关选择					
Efficiency 效率	75%	80%	80%	81%	81%	81%
Input current 输入电流	4.2A/115V 2.1A/230V					
Inrush current 浪涌电流	Cold start冷启动: 56A/230V					
Leakage current 漏电流	<3.5mA / 240VAC					
Overload protection 过载保护	105%-150%Rated output power; Type: Hiccup; Reset: auto recovery 105%-150%额定输出的功率; 模式: 打嗝模式; 复位: 自动恢复					
Working temp humidity 工作温度, 湿度	-25~+70°C, 20 ~ 90% RH					
Storage temp humidity 储存温度, 湿度	-40~+85°C, 10 ~ 95% RH					
Temp coefficient 温度系数	±0.03%/°C (0 ~ 50°C) (+5V)					
Vibration 耐振动	10 ~ 500Hz, 2G 10min/cycle周期, X、Y、Z Each axes轴各60min					
Withstand voltage 耐压性	I/P-O/P: 1.5KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC					
Isolation resistance 隔离电阻	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms / 500VDC / 25°C / 70% RH					
Safety standards 安全标准	Meet UI1012 requirement (Not apply for the mark) 满足UL1012要求 (不申请标记)					
EMC standards EMC标准	Meet FCC part 15J condition class A 满足FCC部分15J条件, 等级A					
Overall dimension 外形尺寸	215x115x50mm					
Weight 重量	0.9Kg					
Note:1. Ripple & noise are measured at 20MHZ of bandwidth by using 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor; 纹波和噪声测量方法: 20HZ带宽下测量, A12双绞线, 终端并0.1uF&47uF的电容器; Note:2. Tolerance: includes set up tolerance, line regulation and load regulation; 精度: 包括设定误差, 线性调整率, 负载调整率; Note:3. Line regulation is measured from low line to high line at rated load; 线性调整率测量方法: 在额定负载下, 从低电压到高电压测试; Note:4. Load regulation is measured from 0% to 100% rated load. 负载调整率测量方法: 负载从0%到100%						

■ Mechanical Specification 结构尺寸


Unit 单位: mm

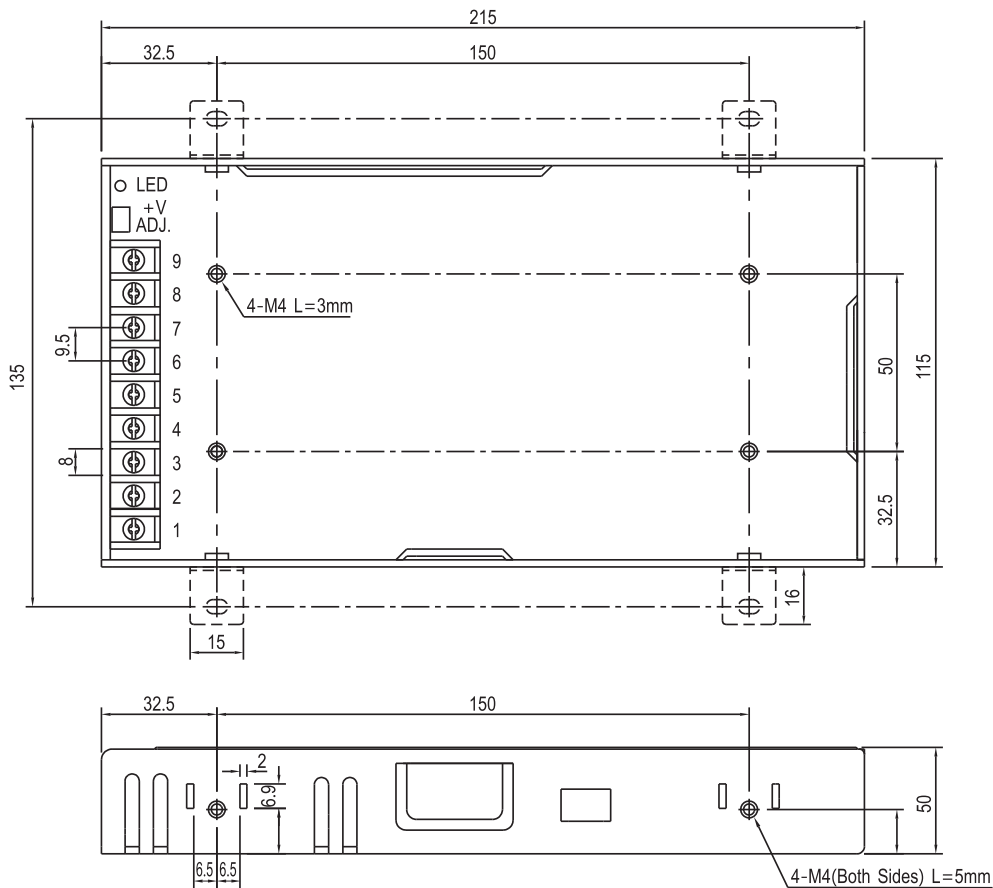

■ Derating Curve 降额曲线

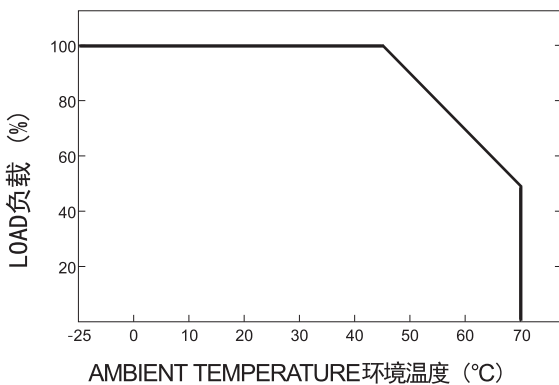

■ Output Derating VS Input Voltage 静态特性曲线

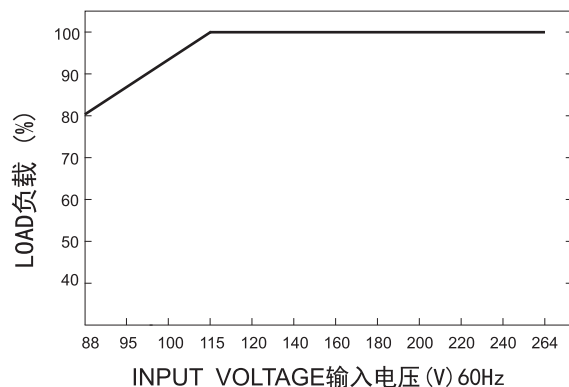

浙江欧迪龙电子科技有限公司
Zhejiang Aotoro Electronic Technology CO.,LTD

ADD: Liuhuag Road 2188#, Liushi town, Yueqing city, Zhejiang province, PRC 325604
浙江省乐清市柳市镇柳黄路2188号

TEL: 86-577-61758688 FAX: 86-577-62757002
Http://www.aotoro.com E-mail: aotoro@aotoro.com